

FIG. 1

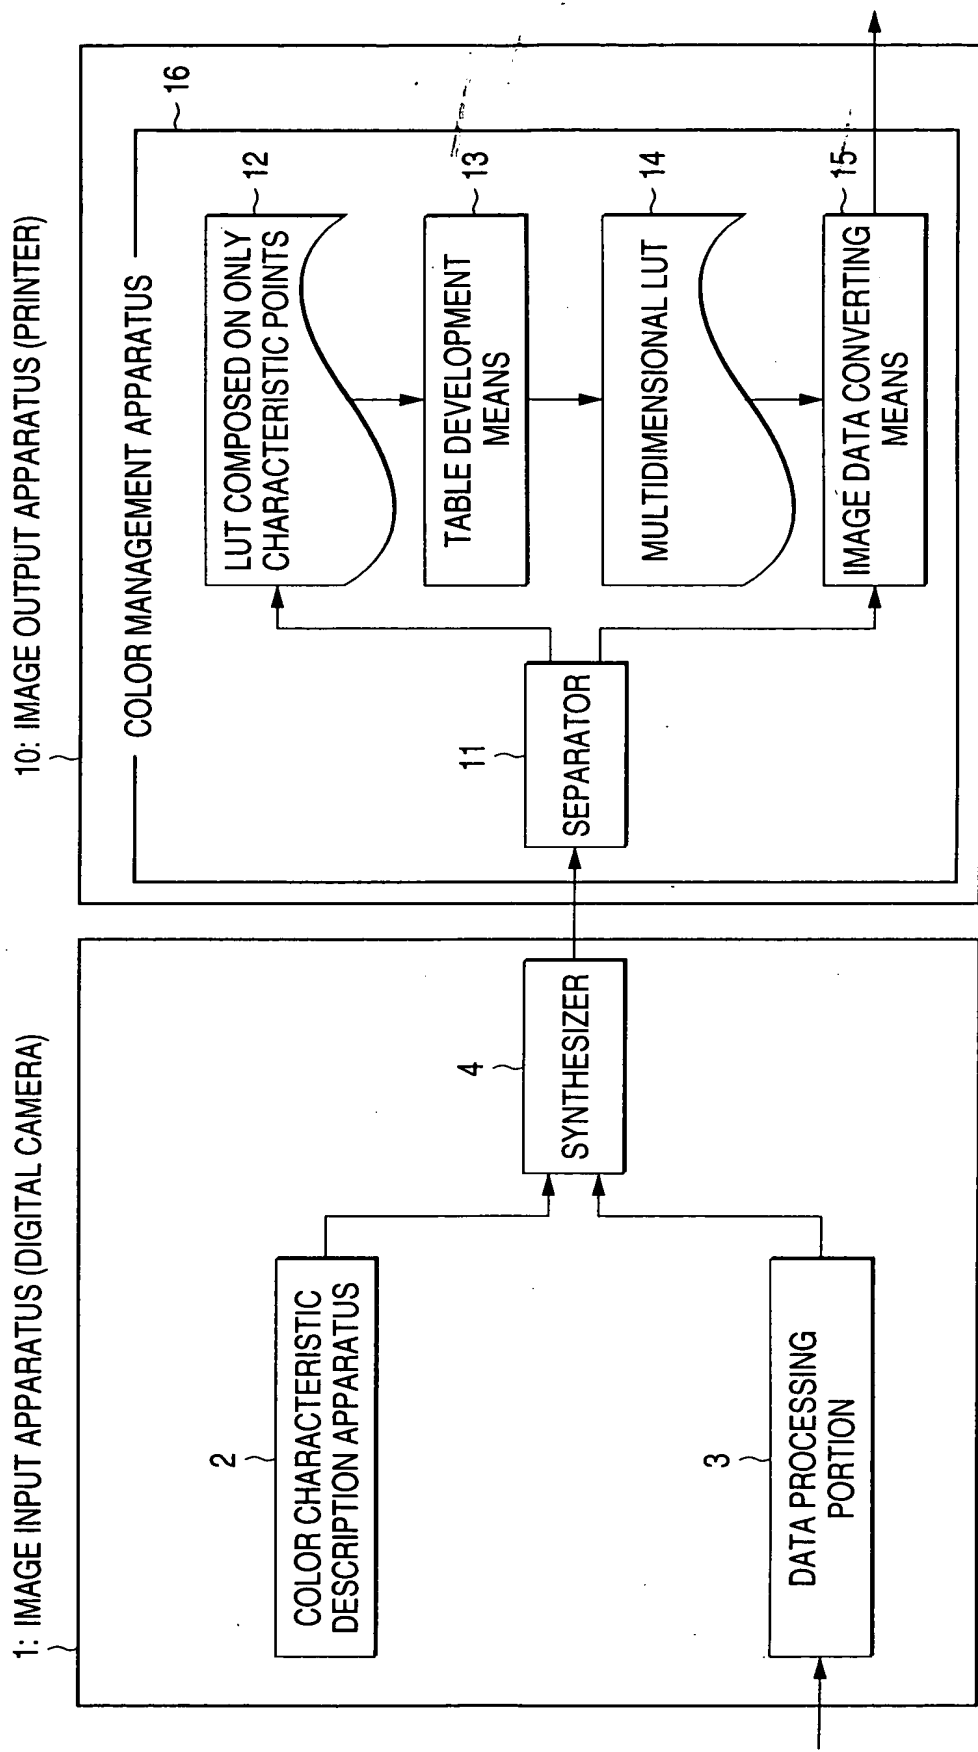


FIG. 5A


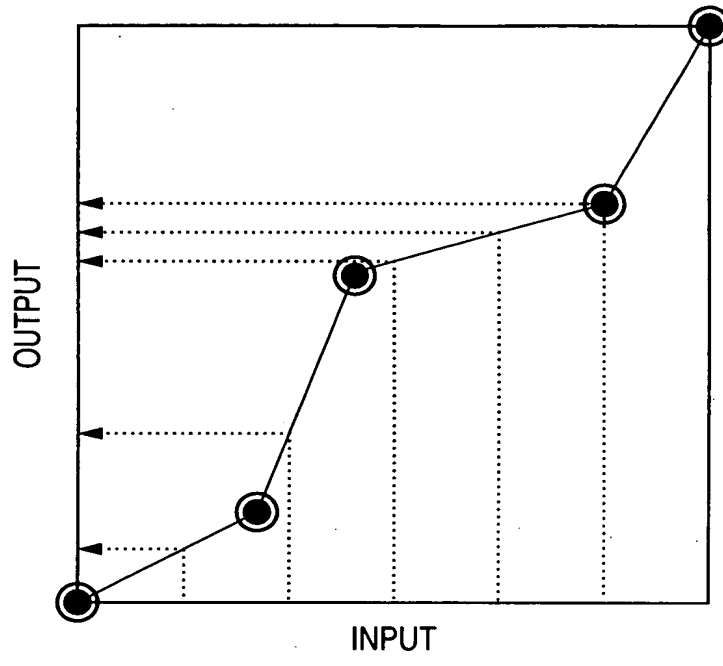


FIG. 5B

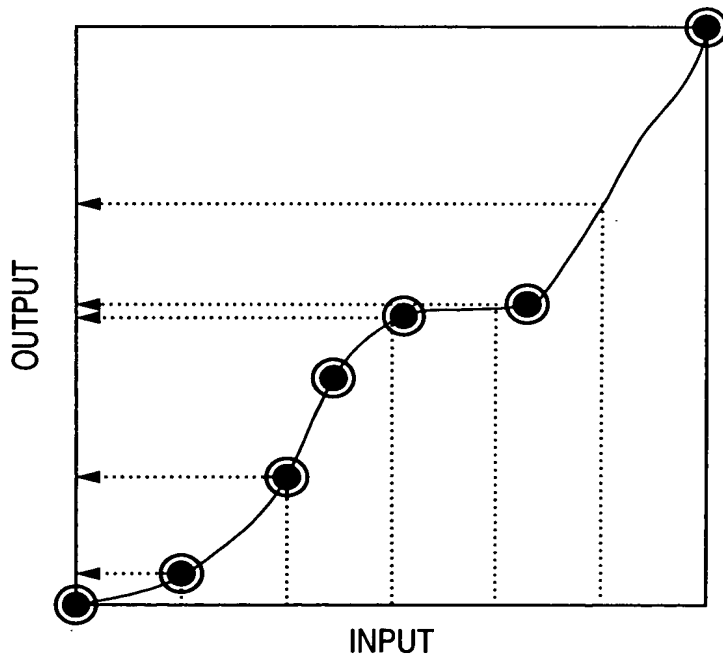

644220" 89295260

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

5/19

FIG. 6

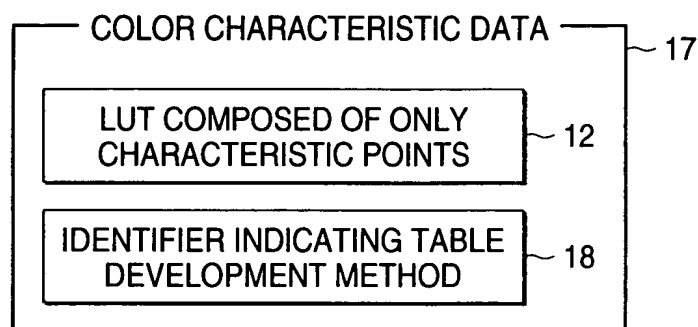


FIG. 7


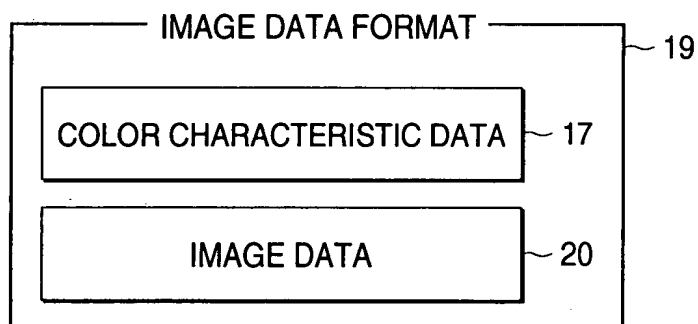


FIG. 8

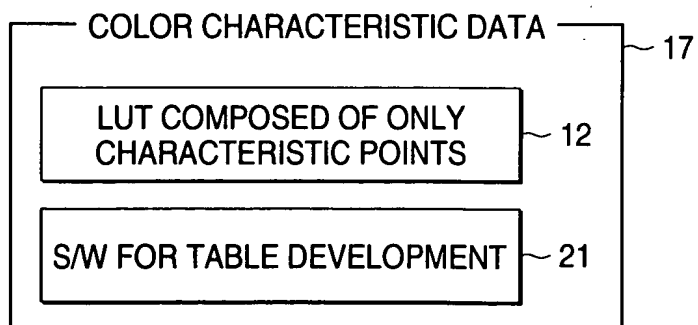

616220" 83E35260

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

6/19

FIG. 9


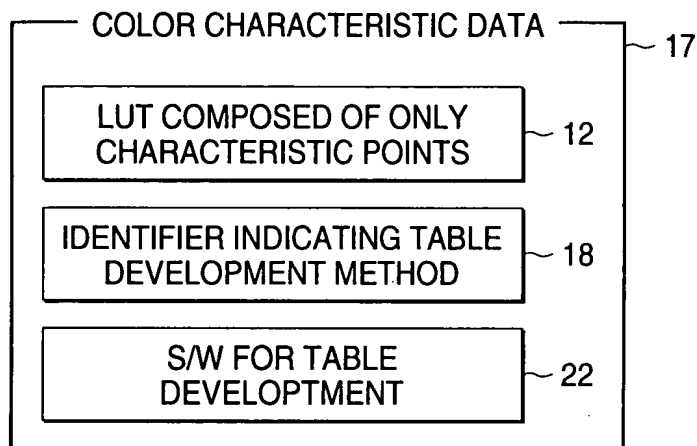


FIG. 10

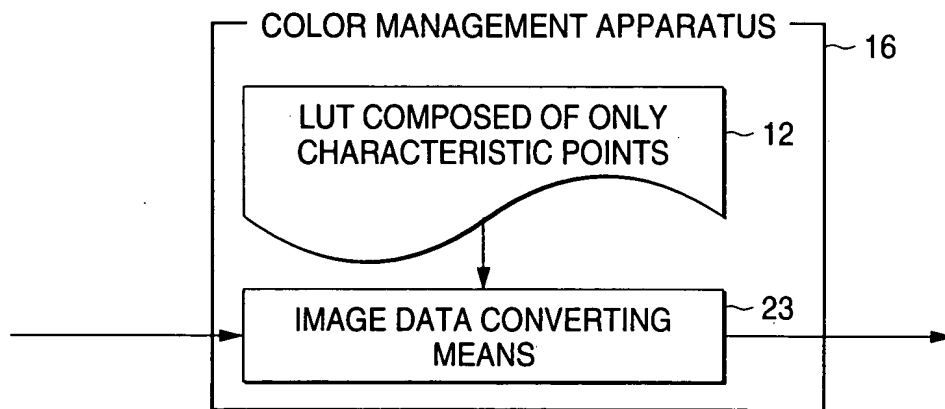

7/19

FIG. 11


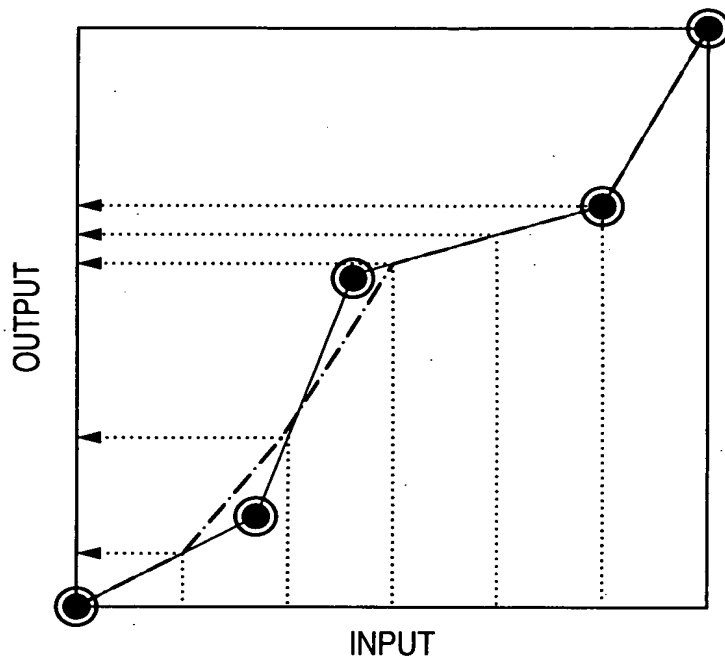


FIG. 12

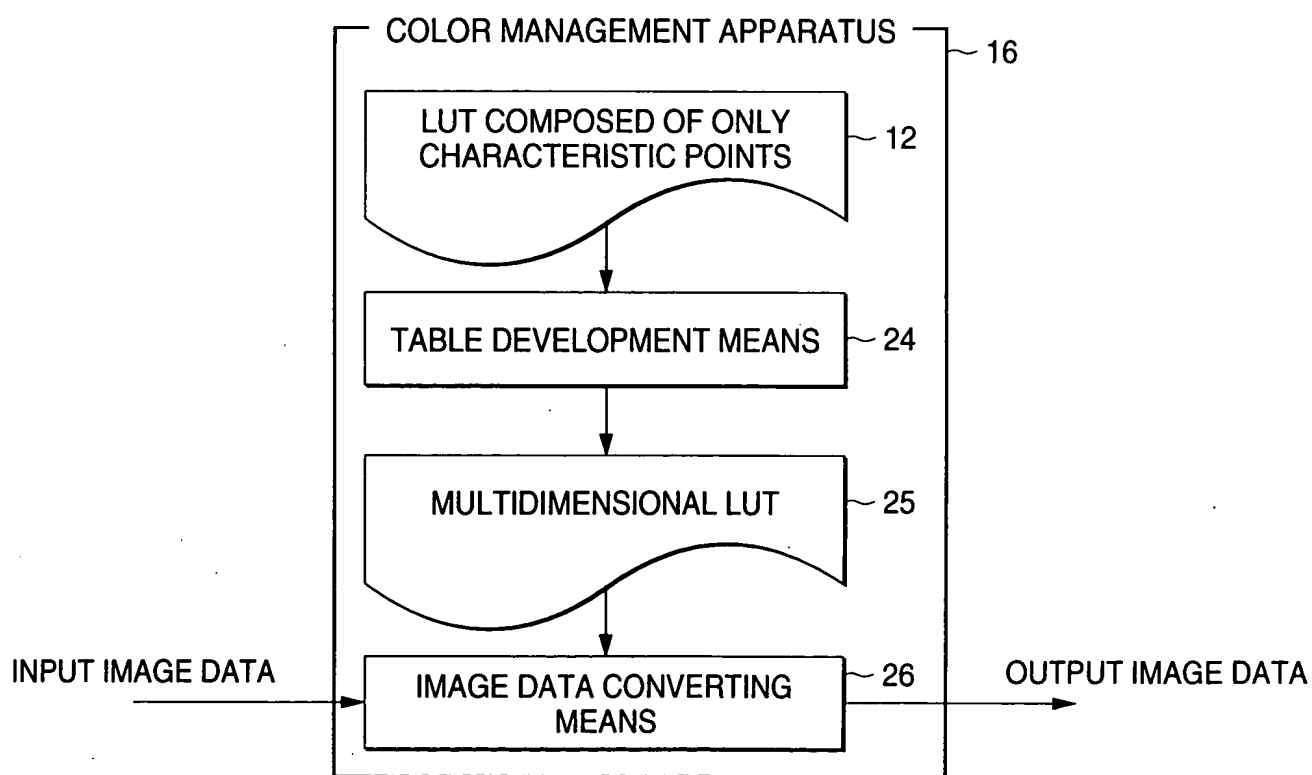

64220" 8925260

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

9/19

FIG. 15A


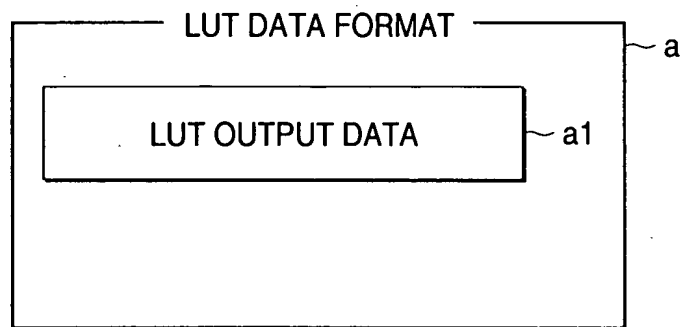



FIG. 15B

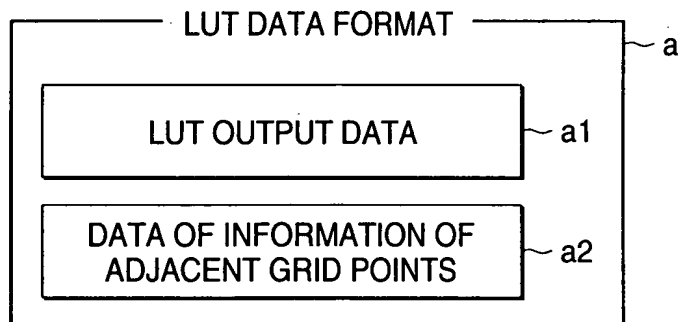

64220" 09E95260

10/19

FIG. 16

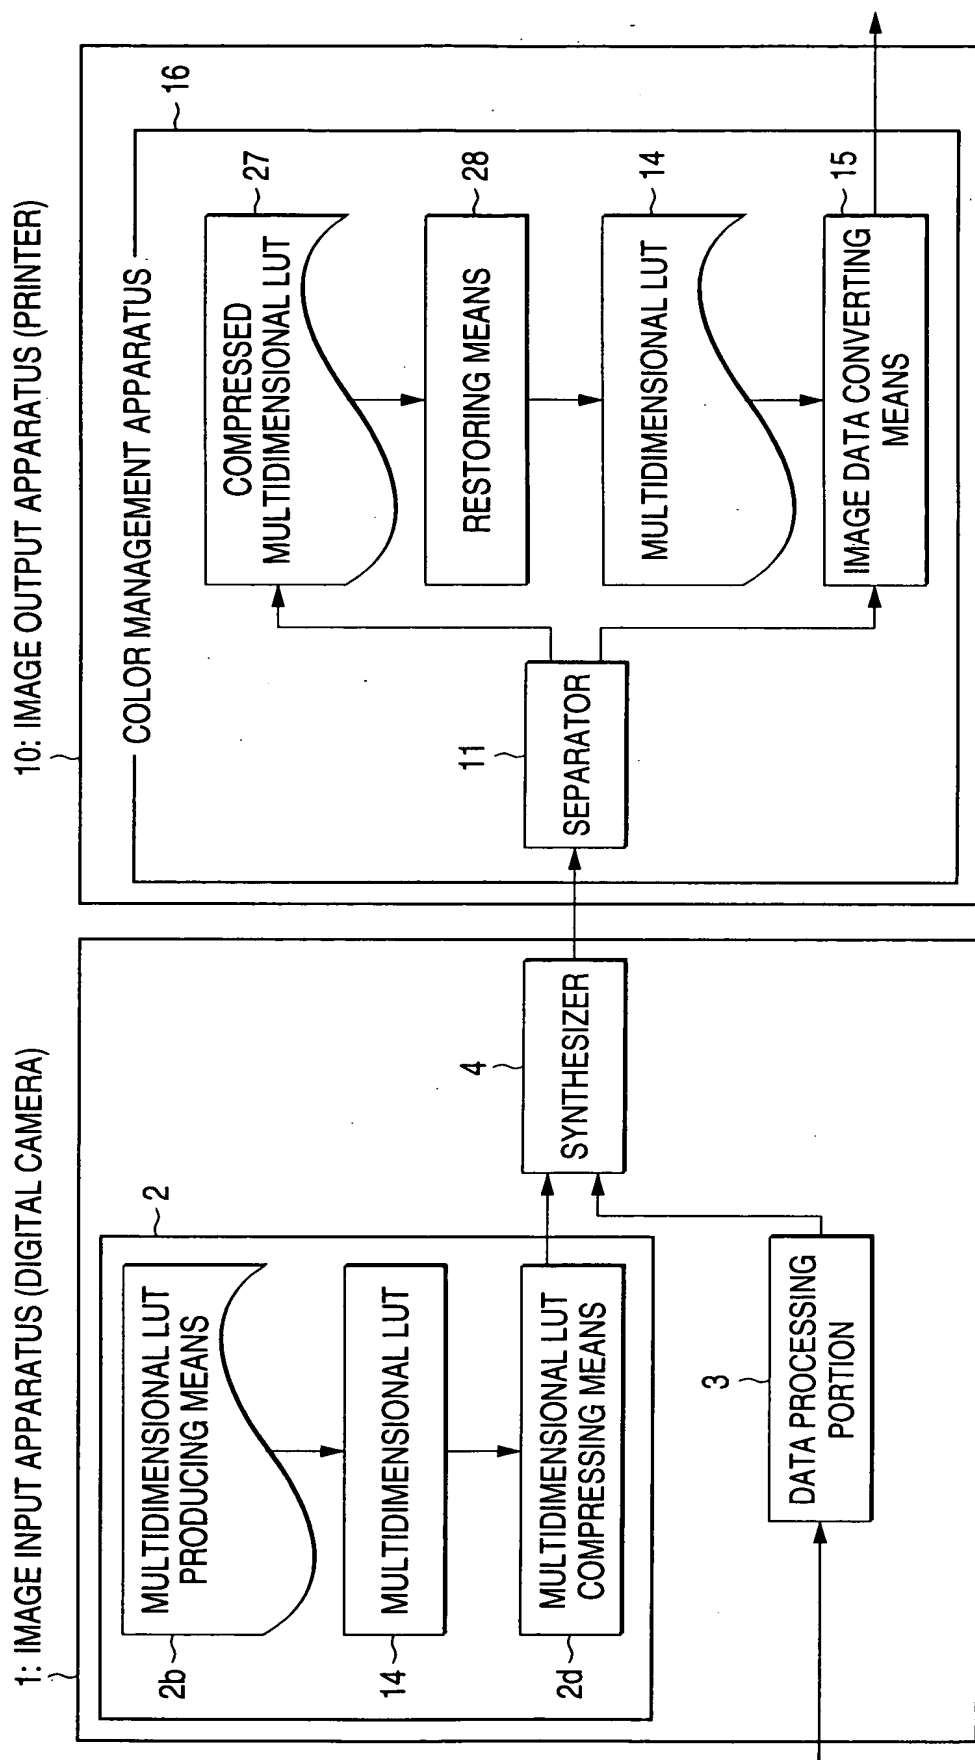

11/19

FIG. 17

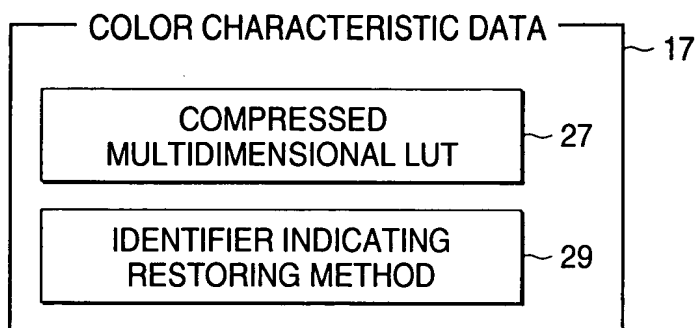


FIG. 18


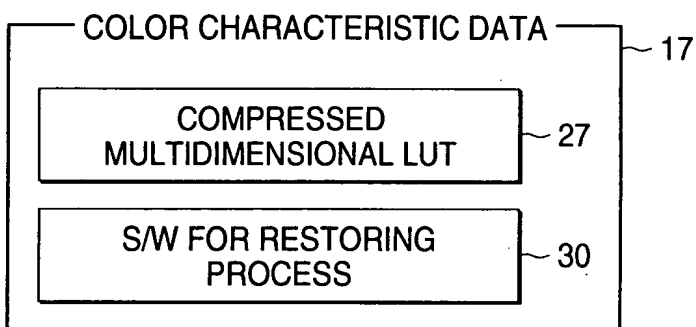


FIG. 19

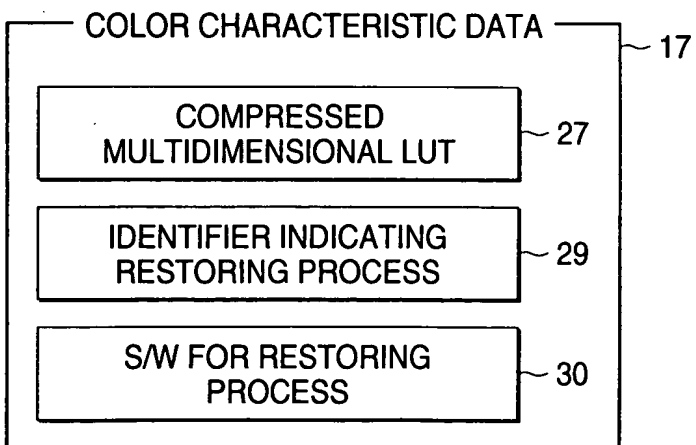

64220-39560

12/19

FIG. 20

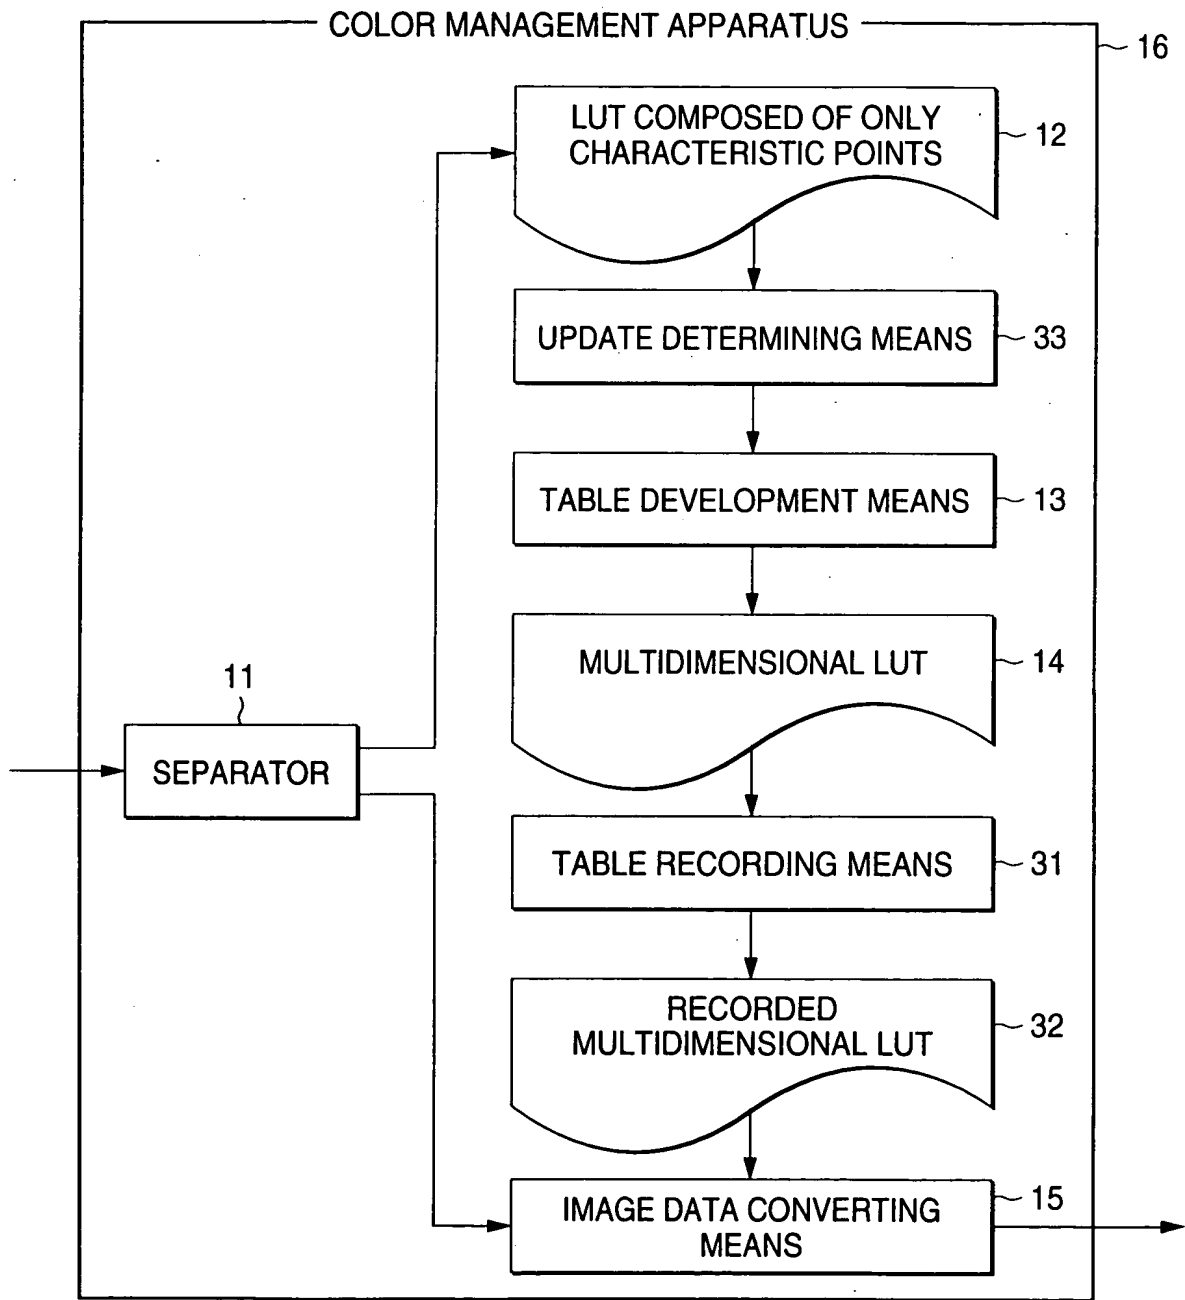


FIG. 21

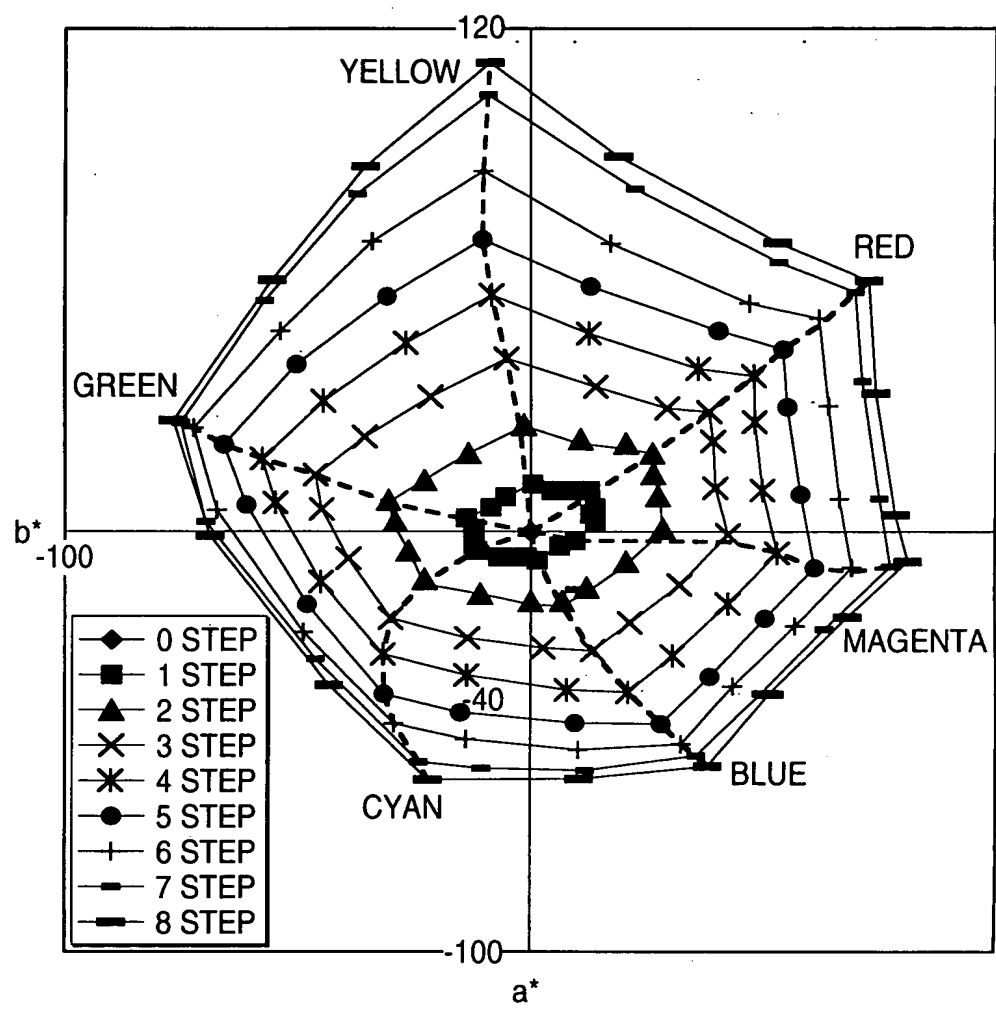


FIG. 22A

PRIMARY COLOR

COLOR COMPOSED OF ONE PRIMARY COLOR

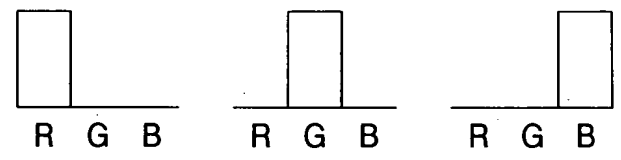


FIG. 22B

SECONDARY COLOR

COLOR COMPOSED OF TWO PRIMARY COLORS

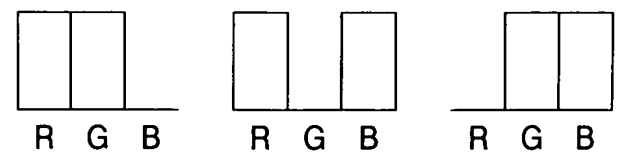


FIG. 22C

TERTIARY COLOR

COLOR COMPOSED OF THREE PRIMARY COLORS






FIG. 23

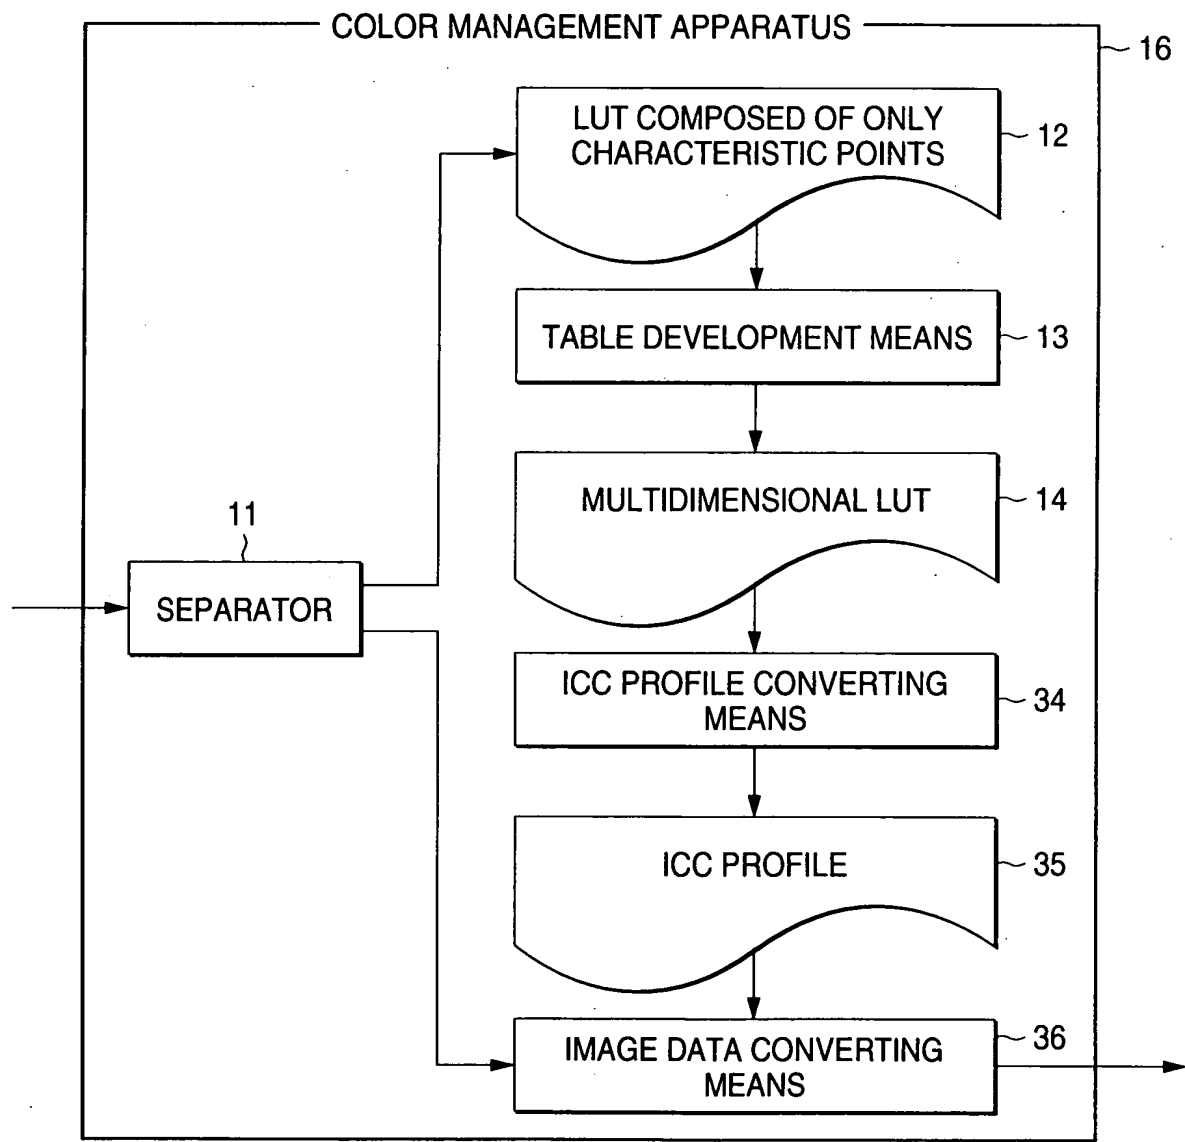

6420" 3259200

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

FIG. 24

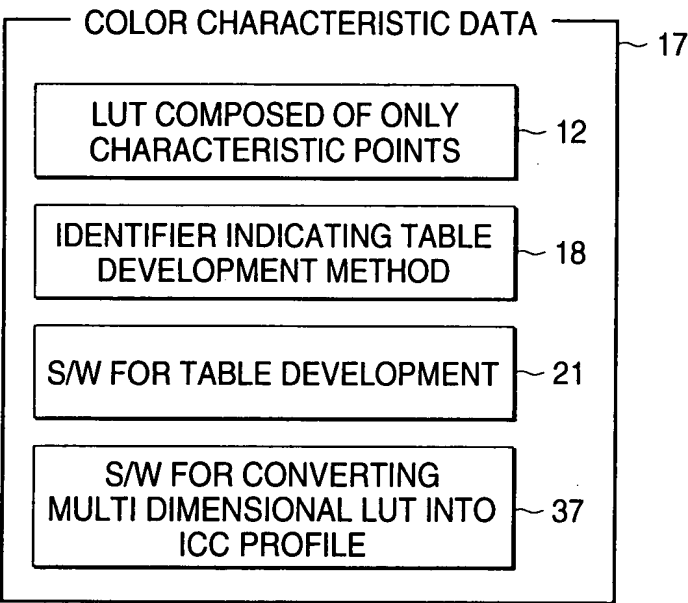

09293360 09293360 09293360

FIG. 25

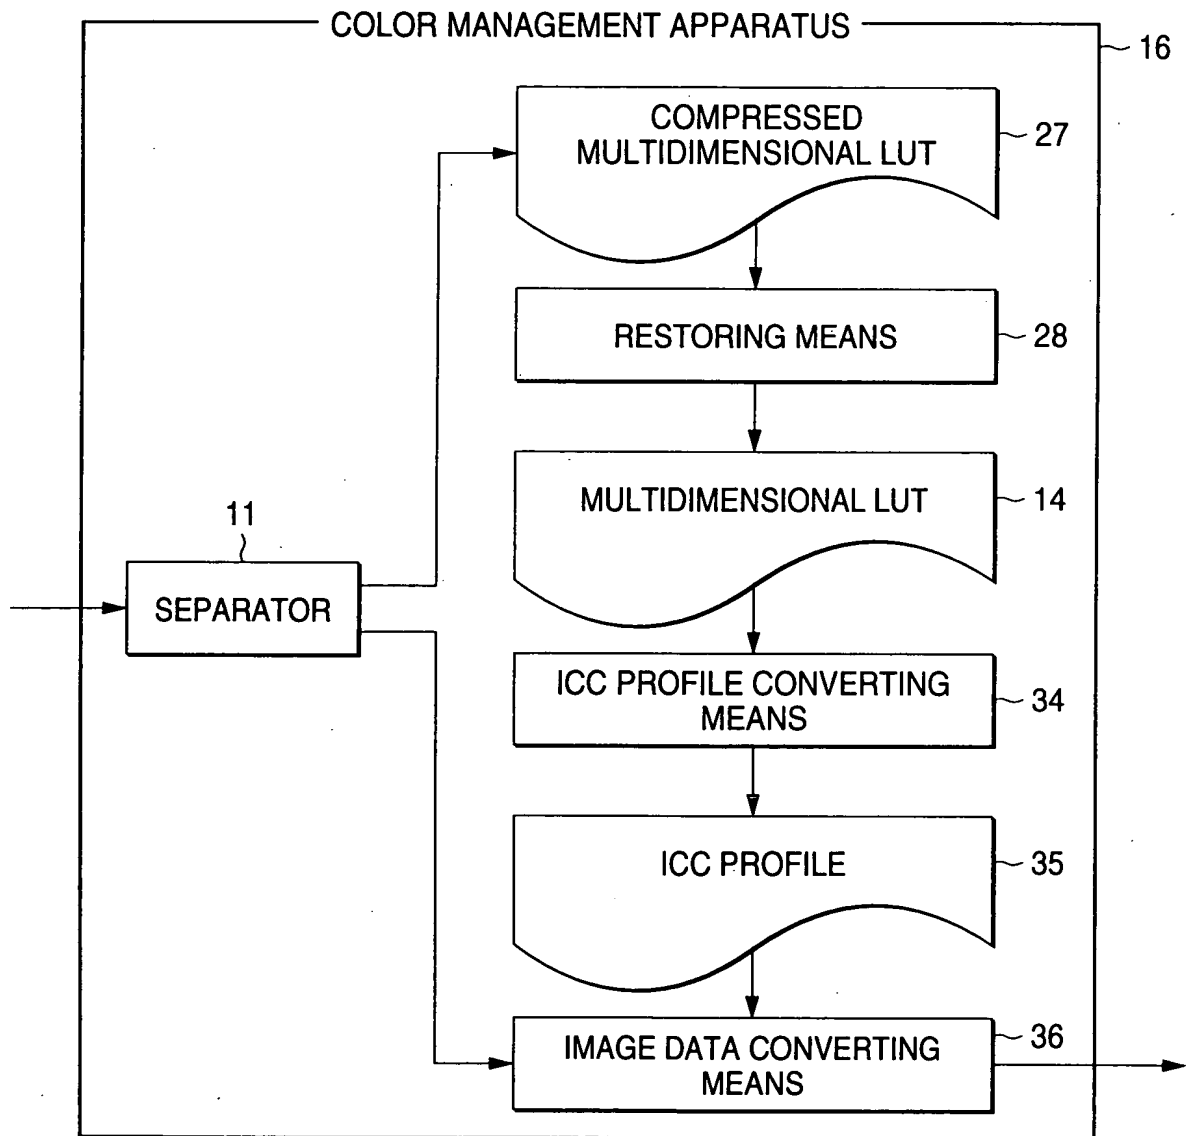


FIG. 26

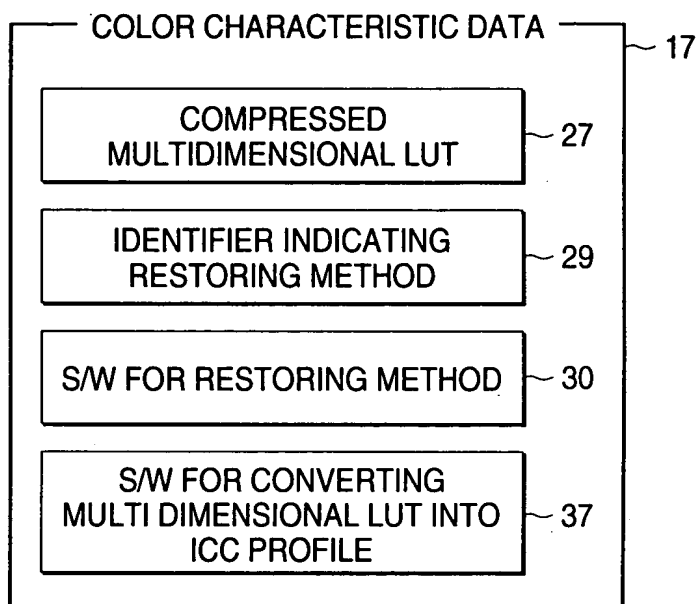


FIG. 27


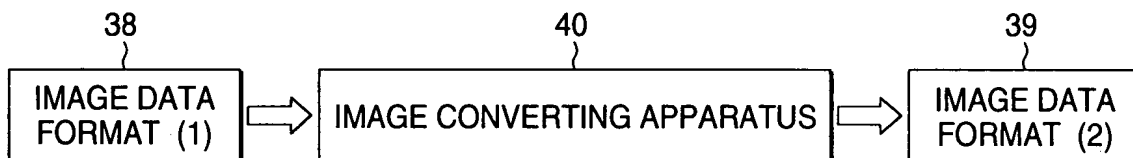


FIG. 28

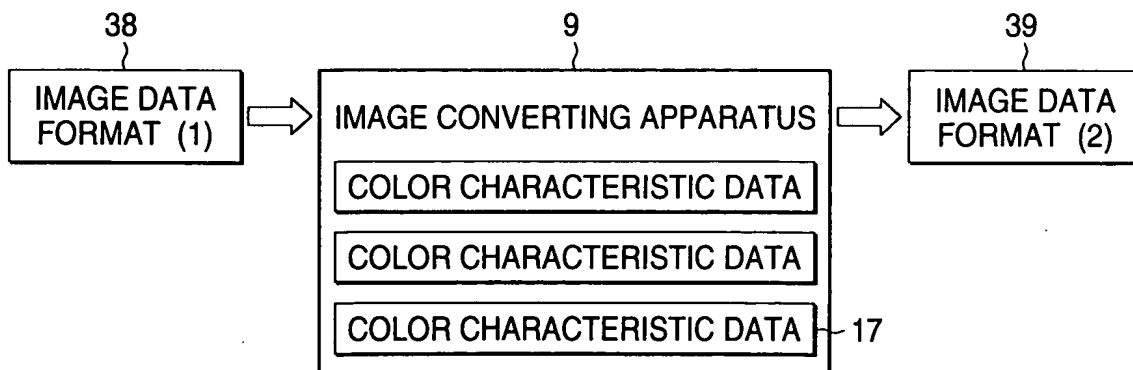

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

18/19

FIG. 29

BYTE OFFSET	CONTENT
0 - 3	'mft1' (6D667431h) [MULTI-FUNCTION TABLE WITH 1 BYTE PRECISION] TYPE DESCRIPTOR
4 - 7	RESERVED, MUST BE SET 0
8	NUMBER OF INPUT CHANNELS
9	NUMBER OF OUTPUT CHANNELS
10	NUMBER OF CLUT GRID POINTS (IDENTICAL FOR EACH SIDE)
11	RESERVED FOR PADDING (FILL WITH 00h)
12 - 15	ENCODED e00 PARAMETER
16 - 19	ENCODED e01 PARAMETER
20 - 23	ENCODED e02 PARAMETER
24 - 27	ENCODED e10 PARAMETER
28 - 31	ENCODED e11 PARAMETER
32 - 35	ENCODED e12 PARAMETER
36 - 39	ENCODED e20 PARAMETER
40 - 43	ENCODED e21 PARAMETER
44 - 47	ENCODED e22 PARAMETER
48 - m	INPUT TABLES
m+1 - n	CLUT VALUES
n+1 - o	OUTPUT TABLES

667431h

6420" 3365560

FIG. 30

